


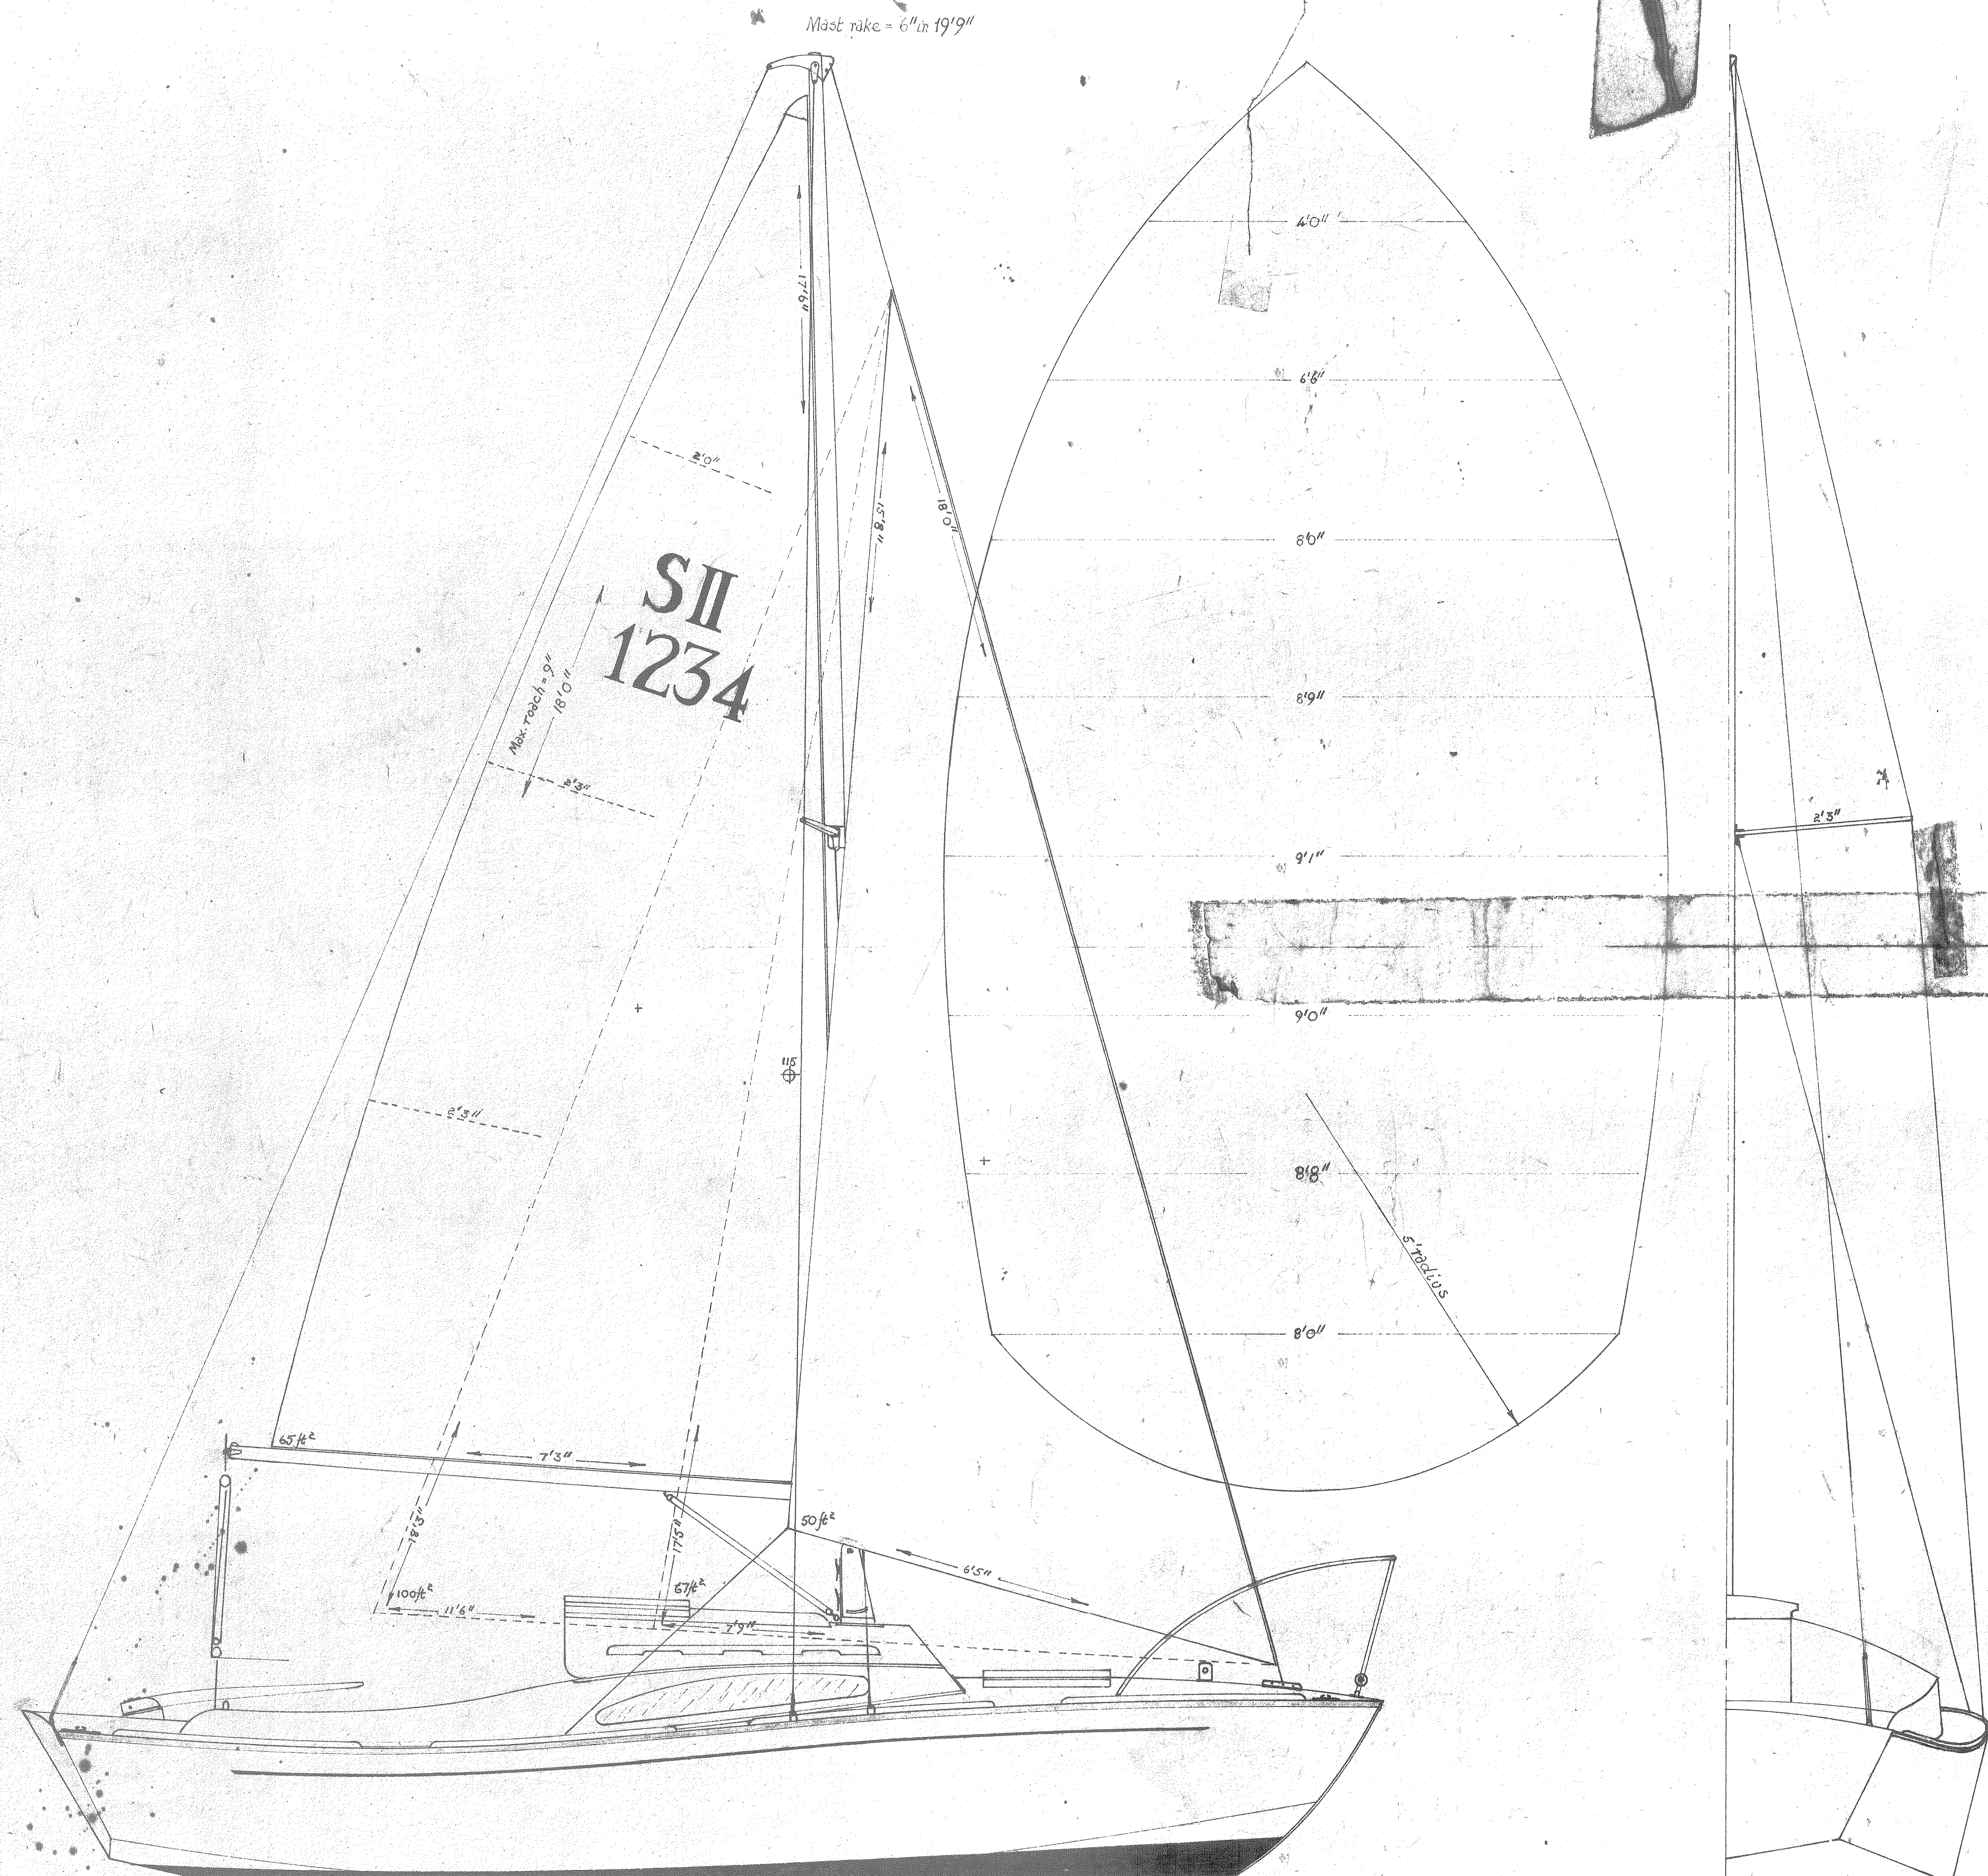

Rigging Schedule

Item	Approx. length ft	Material	Circumference in	Break strain lb	Termination
Forestay	21.25	1x19 s.s.wire	1/2	2600	5/16" s.s. rigging screw
Lower shrouds	11.25	1x19 s.s.wire	3/8	1900	1/4" s.s. rigging screws
Cap shrouds	21.0	1x19 s.s.wire	3/8	1900	1/4" s.s. rigging screws
Backstays	22.0	1x19 s.s.wire	3/8	1900	4 of 1/2" terylene
Jib halyard	4.4.0	Pre-stretched	3/4	1100	1/2" clip shackles
Main halyard	4.0.0	Terylene	3/4	1100	1/2" clip shackles
Main sheet	4.0.0	Terylene	1 1/4	2200	—
Jib sheets	2.6.0	Terylene	1 1/4	2200	—
Genoa sheets	4.0.0	Terylene	3/4	1100	—
Kicking strap	9.0	Terylene	5/8	800	—

Note: Shroud and forestay lengths are approximate, and include all terminal fittings.
Twin backstays are required only when maximum performance is required.

SILHOUETTE II
SHEET 1 [3/4'-1']
 Issue 2: October 1961
 Issue 1: January 1955

Copyright © ROBERT TUCKER, A.R.I.N.A.,
 58 Southbury Road,
 Enfield, Middlesex, England